


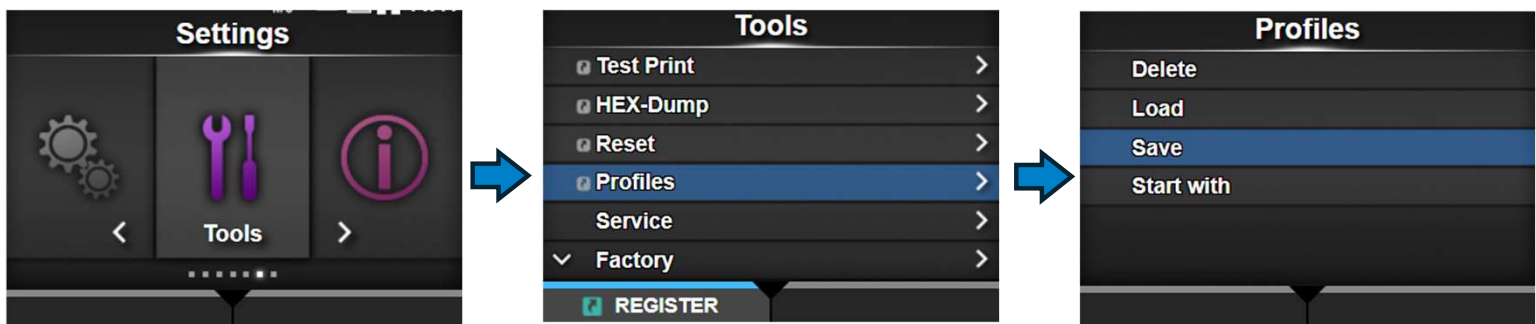

TT-011 Using Profiles


S84NX/S86NX

Using **PROFILES** can be a great way to store a **Backup** or quickly switch between different product settings. You can simply switch profiles rather than manually making all the changes in the printer settings. Once you have the printer settings optimized, it is recommended to save a **Profile** so you can revert back to these settings if someone makes changes.



1. With the printer Offline, enter the [Settings] Menu and select [Tools]. Then use the down arrow to select [Profiles]. Select [Save] to save the current printer settings to a Profile.



2. Press the  button with the “+” symbol to add a new Profile. Use the onscreen keyboard to name the Profile (max 32 characters). Press the  button with the “✓” when ready to save. You will see which Profile is loaded by the Profile name in parentheses.

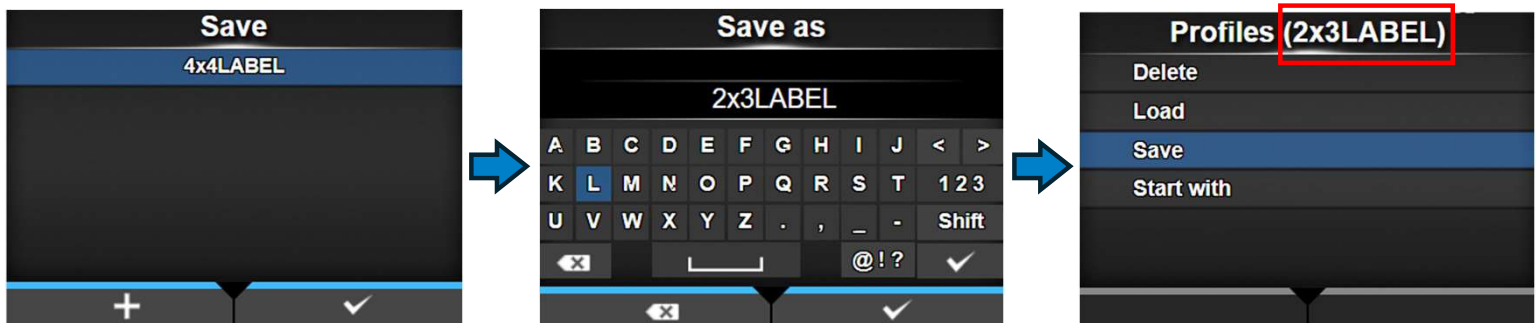

3. Back at the [Profiles] menu, you can use [LOAD] to switch between the different profiles you have saved. You can use [Delete] to remove any unwanted Profiles. And you can use [Start with] to assign a profile to be loaded when the printer powers on. Selecting (none) will leave the printer with whatever settings it had when it was powered off.

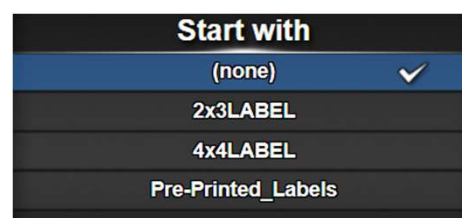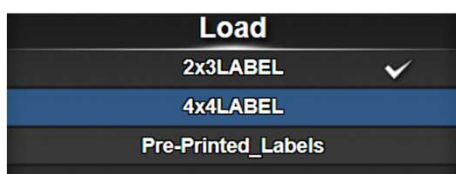

TT-011 Using Profiles

S84NX/S86NX

4. You can add [Profiles] to the shortcut menu so that operators have quick and easy access to changing the Profile during Product Changeovers while keeping the printer Online.
See TT-012 Shortcut Menu for details on how to register product settings to the Shortcut Menu.
6. If connected via LAN, you can also access the Profiles menu using the SATO WebConfig tool.
On a device connected to the same network, Type in the printer's IP address to browser.
Login → User: service Password: "USB Serial#" + service



The image shows the SATO WebConfig web interface. The top header features the SATO logo and the text "WebConfig" with the tagline "Ceaseless Creativity for a Sustainable World". Below the header is a navigation bar with tabs: "Dashboard", "Settings" (highlighted in yellow), "Tools", and "Certificates". On the left side, there is a sidebar menu with icons and labels: "Printing", "Interface", "Applications", "System", "Tools" (highlighted in yellow), and "Information". The main content area is divided into sections. The first section is "HEX-Dump". Below it is the "Profiles" section, which is also highlighted in yellow. This section contains a table with five rows: "Delete", "Load", "Save", "Save as", and "Start with". Each row has a corresponding dropdown menu or text input field. The "Delete", "Load", and "Save" dropdowns are currently set to "4x4LABEL". The "Start with" dropdown is set to "(none)". The "Save as" field is an empty text input. Below the "Profiles" section is a "Service" section.

HEX-Dump	
▼ Profiles	
Delete	(none) ▼
Load	4x4LABEL ▼
Save	4x4LABEL ▼
Save as	
Start with	(none) ▼
► Service	