


## TT-007 Auto-Calibration


## S84NX/S86NX


**Auto – Calibration** is a fast and easy way to calibrate the media sensor and it works well for the large majority of applications.

1. With the Printer Offline, go to Settings → Printing → Advanced → Calibrate

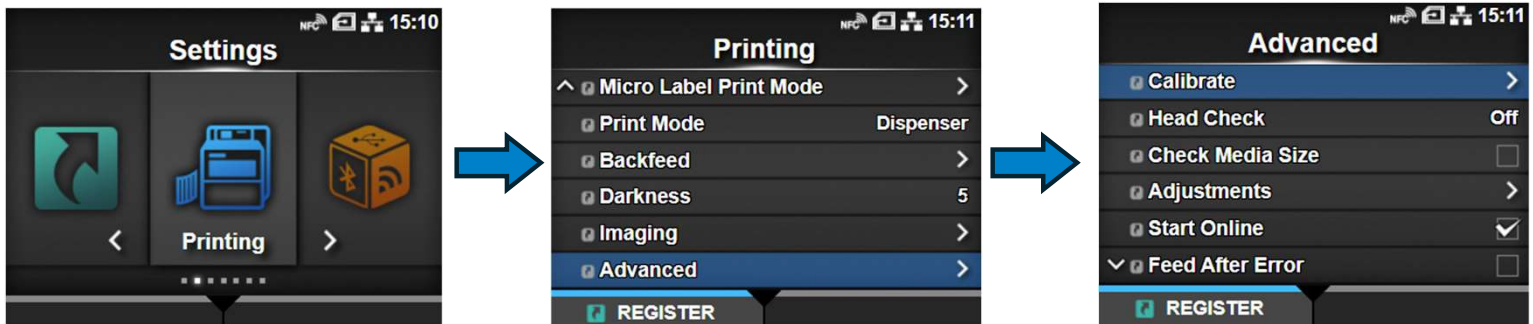

2. Select Auto-calibration and you will have the option to select which type of media sensor you are using: Gap, I-mark, or GAP + I-mark

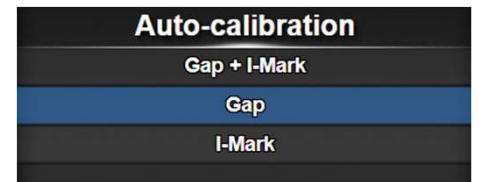

3. You will be prompted to do the following:
  - a. Open the Front Cover of the printer, unlock the headlock lever and the media sensor latch so you can manually feed/adjust the media.
  - b. Remove a few labels and position the media so that the liner is positioned over the sensor (without a label). If using I-marks, be sure the I-mark on the media is not positioned above the I-mark sensor.
  - c. Close the media sensor latch and the headlock lever. Be sure the media is run all the way through both ends and is locked in, laying flat like it would be in normal production.
  - d. Press the  button to proceed with auto-calibration. After a few seconds you should see “Calibration completed successfully”

